

Dramix® 4D

65/35BG


Aspect ratio

Length

Bright

Glued

Concrete Reinforcement

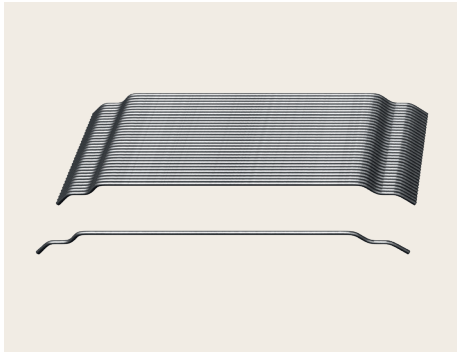

Optimized anchorage

Dramix® 4D provides optimal crack control for standard statically indeterminate concrete structures that are subjected to regular static, fatigue and dynamic loadings with high serviceability requirements.

Glue technology for three-dimensional reinforcement

Dramix® steel fibres are bundled with water-soluble glue. The glue helps to avoid fibre balling during mixing and ensures a homogeneous distribution of fibres throughout the concrete mix.

Material properties

Nom. tensile strength:
1.850 (N/mm²)
Young's modulus:
210.000 (N/mm²)
Strain at ultimate strength:
0,8 %

Geometry

fibre family



Length (l) / Diameter (d)




Aspect ratio (l/d): 65


Packaging

BAGS:
10 / 20 kg

BIG BAG:
800 - 1.200 kg



Handling



NO STACKING



KEEP DRY

Minimum EN 14889-1 dosage

15 kg/m³

Fibre network

8.032 m/m³ at 15 kg/m³
14.232 fibres/kg

Product certificates*



System certificates*

Dramix® plants are ISO 9001 and ISO 14001 certified.



Contact us:

For inquiries and orders on www.bekaert.com/contactdramix



For recommendations on: stacking, handling, dosing and mixing, visit www.bekaert.com/dosingdramix

Any other specific document or certificate can be found on www.bekaert.com/dramix/downloads

* Product- and System certificates are plant specific.